

____ Priority is claimed under 35 U.S.C. § 119 based on filing in ____.

	<u>Application No.</u>	<u>Filing Date</u>
(1)		
(2)	_____	_____
(3)	_____	_____

____ (No.) Certified copy (copies) ____ are attached; or ____ were previously filed on ____.

____ Other (specify): _____

The filing fee has been calculated as shown below:

FOR: <u>LARGE ENTITY</u>	NO. FILED	NO. EXTRA	RATE	FEE
BASIC FEE				\$690
TOTAL CLAIMS	16 - 20		\$18	\$
INDEPENDENT CLAIMS	2- 3		\$78	\$
MULTIPLE DEPENDENT CLAIM(S) PRESENTED			\$260	\$ _____
TOTAL FEE:				\$690.00

____ Please charge my Deposit Account No. 10-0447 in the amount of \$____ This sheet is attached in duplicate.

X A check in the amount of \$690.00 is attached. Please charge any deficiency or credit any overpayment to Deposit Account No. 10-0447.

X The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 10-0447 This sheet is attached in triplicate.

X Any additional filing fees required under 37 CFR 1.16 including fees for presentation of extra claims.

X Any additional patent application processing fees under 37 CFR 1.17 and under 37 CFR 1.20(d).


X The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 10-0447. This sheet is attached in duplicate.

X Any patent application processing fees under 37 CFR 1.17 and under 37 CFR 1.20(d).

— The issue fee set in 37 CFR 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR 1.311(b).

X Any filing fees under 37 CFR 1.16 including fees for presentation of extra claims.


JENKENS & GILCHRIST

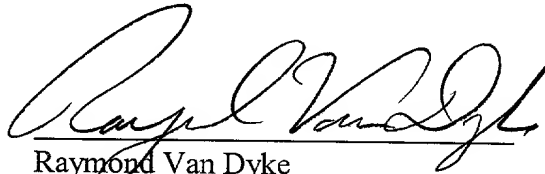

Raymond Van Dyke
Registration No. 34,746

Date: August 31, 2000

JENKENS & GILCHRIST
1445 Ross Avenue, Suite 3200
Dallas, Texas 75202-2799
214/855-4708

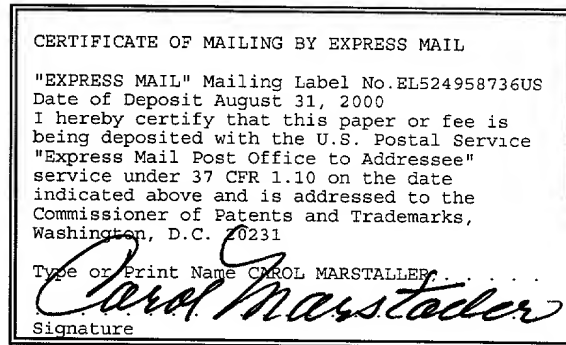

ACCESS TECHNOLOGY INTEGRATED HEADER COMPRESSION

CROSS-REFERENCES TO RELATED APPLICATIONS

This Application for Patent claims the benefit of
priority from, and hereby incorporates by reference the
entire disclosure of, co-pending U.S. Provisional
Application for Patent Serial No. 60/186700, filed March
3, 2000.

FIELD OF THE INVENTION

The invention relates generally to packet
communications and, more particularly, to header
compression in packet communications.

BACKGROUND OF THE INVENTION

The tremendous success of the Internet has made it desirable to expand the Internet Protocol (IP) to a wide variety of applications including voice and speech communication. The objective is, of course, to use the Internet as a link for transporting voice and speech data. Speech data has been transported across the Internet using IP-based transport layer protocols such as the User Datagram Protocol (UDP) and the Real-time Transport Protocol (RTP). In a typical application, a computer running telephony software converts speech into digital data which is then assembled into IP-based data packets that are suitable for transfer across the Internet. Additional information regarding the UDP and RTP protocols may be found in the following publications which are incorporated herein by reference: Jon Postel, *User Datagram Protocol*, DARPA RFC 786, August 1980; Henning Schulzrinne et al., *RRT: A Transport Protocol for Real-time Applications*, IETF RFC 1889, IETF Audio/video Transport Working Group, January 1996.

A typical IP-based speech data packet 10 is shown in FIG. 1. The packet 10 is one of a plurality of related

packets that form a stream of packets representing a portion of, for example, a voice conversation. The packet 10 is made of a header portion 12 and a payload portion 14. The header 12 may comprise a number of header components including static information 16 such as the source and destination address fields (not shown), and dynamic information 18 such as the IP identification, RTP sequence number, and RTP time stamp fields. For ordinary speech data transported over IP-based protocols, the header 12 may represent up to 70% of the data packet 10, leaving little capacity for the payload 14. This inefficient use of bandwidth would be much too expensive over a cellular link for IP-based transportation to become a viable alternative to circuit switched speech services. Therefore, some compression or reduction of the header 12 is generally required.

The term header compression refers to the art of transparently minimizing the necessary bandwidth for information carried in packet headers on a per hop basis over point-to-point links. The headers are compressed or otherwise reduced at the transmitting side and then reconstructed at the receiving side. Recall that headers generally comprise both static information and dynamic

information, i.e., information that changes from one packet to the next. Header compression is usually realized by sending the static information initially. Then, dynamic information is sent by transmitting only the difference, or delta, from the previous header.

One method of implementing header compression is by using a compression technique called Robust Checksum-based Header Compression (ROCCO). This method uses a CRC to verify the correctness of reconstructed headers at the receiving side. In addition to the CRC, the compressed headers may also contain a predefined code field which is used to indicate how the dynamic information fields have changed from the previous packet to the current packet. As mentioned previously, the dynamic information fields include the IP identification, the RTP sequence number, and the RTP time stamp.

However, as long as bandwidth continues to be considered a valuable commodity, there will continue to be a need to conserve more bandwidth, especially over cellular links. Therefore, it is desirable to be able to further reduce the amount of header information transmitted, even where such information has already been compressed by an algorithm such as ROCCO.

The present invention advantageously provides techniques for conserving additional bandwidth by omitting, from the compressed header, information related to the changes in the IP identification, RTP sequence
5 number, and RTP time stamp. Instead, reconstruction of the header at the receiving or decompressor side is performed based on information about these fields as retained in the access technology.

SUMMARY OF THE INVENTION

10 The present invention is directed to an access technology integrated header compression method or apparatus for sending an IP-based speech data packet over a radio interface without sending information related to changes in the IP identification, RTP sequence number, or
15 RTP time stamp. The omission of information related to changes in these fields reduces the bandwidth consumed by the header. These fields are then reconstructed at the receiver side of the radio interface.

20 In one aspect, the invention is directed to a method of sending an IP-based data packet across a radio link, the data packet having a packet header including an IP identification header field, sequence number header

field, and time stamp header field. The method comprises the steps of compressing the packet header, adjusting an IP identification within the IP identification header field of the packet header to conform to a stream-sequential identification format, synchronizing the data packet to a radio frame based on a time stamp within the time stamp header field of the packet header and a timing of the radio frame, and transmitting the data packet with the radio frame over the radio link.

In another aspect, the invention is directed to a telecommunication system for sending an IP-based data packet across a radio link, the data packet having a packet header including an IP identification header field, sequence number header field, and time stamp header field. The system comprises a compressor for compressing the packet header, an IP identification processor for adjusting an IP identification within the IP identification header field to conform to a stream-sequential format, a synchronizer for synchronizing the data packet to a radio frame based on a time stamp within the time stamp header field and a timing of the radio frame, and a transmitter for

transmitting the data packet with the radio frame over the radio link.

5 A more complete appreciation of the present invention and the scope thereof can be obtained from the accompanying drawings (which are briefly summarized below), the following detailed description of the presently-preferred embodiments of the invention, and the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

10 A more complete understanding of the method and apparatus of the present invention may be obtained by reference to the following detailed description when taken in conjunction with the accompanying drawings wherein:

15 FIGURE 1 illustrates a typical IP-based speech data packet;

FIGURE 2 illustrates the flow of the speech data packet across a communications link via an access technology;

20 FIGURE 3 illustrates an exemplary embodiment of the header compressor incorporated into the access technology shown in FIGURE 2;

FIGURE 4 illustrates the general flow of the exemplary embodiment shown in FIGURE 2;

FIGURE 5 illustrates a packet synchronization flow of the embodiment shown in FIGURE 2;

5 FIGURE 6 is a graphical representation of the packet synchronization flow shown in FIGURE 5;

FIGURE 7 illustrates an exemplary embodiment of the header decompressor at the receiver side shown in FIGURE 2;

10 FIGURE 8 is a graphical representation of the RTP sequence number reconstruction; and

FIGURE 9 illustrates the general flow of the exemplary embodiment shown in FIGURE 7.

15 **DETAILED DESCRIPTION OF THE PRESENTLY PREFERRED EXEMPLARY EMBODIMENTS**

20 The present invention will now be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure

will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art.

As mentioned previously, most conventional header compression algorithms send only the changes, or deltas, in the header fields and not the actual fields themselves. This means that only the least significant bit or bits are sent as they are the ones most likely to be changing. The present invention improves upon this process by omitting to send even the information related to the changes. In an exemplary embodiment, the present invention omits sending information specifically related to changes in the IP identification, RTP sequence number, and RTP time stamp.

In accordance with the exemplary embodiment, static information is sent at the beginning of a packet stream, preferably before the first packet in the stream is sent. The static information may be sent on a dedicated channel or a random access channel, for example, as long as the information is made available at the receiver before the first packet arrives. The static information may include the source and destination addresses of the packets in the stream and generally may be applied to all the packets in the stream. The packets are then sent in

sequential order minus the changes, or deltas, in the IP identification, RTP sequence number, or RTP time stamp.

The IP identifications of the packets are preferably stream-sequential, that is, they follow a predictable sequence within the stream. If they are not, then they should be adjusted to conform to a stream-sequential format, as will be explained herein. As for the RTP sequence number and RTP time stamp, these should already be in a sequence format which is predictable and should not need adjusting.

Referring now to FIGURE 2, a pertinent portion of an exemplary packet-switched communication network is shown. As can be seen, a packet source 20 provides data packets across a link 22 to an access technology 24. The packet source 20 produces a stream of data packets that follow IP-based protocols such as the UDP and RTP protocols. The link 22 may be any link which is capable of transporting the data packets from the packet source 20 to the access technology 24 such as PSTN or ISDN lines.

The access technology 24, in general, is a layer of communications protocols that provides access to a receiver 28 over a radio interface 26. Examples of the access technology 24 include, but are not limited to the

Global System for Mobile Communications (GSM), Code
Division Multiple Access (CDMA), Wideband Code Division
Multiple Access (WCDMA), Advanced Mobile Phone System
(AMPS), Digital Advanced Mobile Phone System (D-AMPS),
5 Personal Digital Cellular (PDC), Digital European
Cordless Telephone (DECT), Cellular Digital Packet Data
(CDPD), etc. The access technology 24 provides
conventional compression for the headers of the data
packets received from the packet source 20 and transmits
10 the packets (with the compressed headers) across a link
26 to a receiver 28. This compression may be done, for
example, in accordance with the ROCCO compression
algorithm, or with any other header compression
algorithm. The link 26 may be any radio interface
15 between the access technology 24 and the receiver 28 such
as a cellular link. Finally, the receiver 28 receives
the packets from the access technology 24 and
reconstructs the headers, and then forwards the packets
including reconstructed headers to their next
20 destination.

Included within the access technology 24 are a
number of functional components for compressing the data
packet headers. In one embodiment, illustrated in more

detail in FIGURE 3, the access technology 24 includes a conventional header compressor 30 which compresses the received packet headers. Once the packet headers have been processed by the compressor 30, a static information processor 32 checks to see if the static information for the packets in this particular stream has been previously transmitted to the receiver 28. If it has not, the static information processor 32 causes the static information to be sent to the receiver 28.

The access technology 24 also includes an IP identification processor 34 which determines what type of IP identification is contained in the packet headers. In general, there may be three types of IP identification formats: stream-sequential, random, and host-sequential. In stream-sequential formatting, the IP identification is substantially related to the RTP sequence number and may be reliably calculated based on the RTP sequence number. The host-sequential or random formats, on the other hand, are not reliably predictable. Therefore, if the IP identification follows either the host-sequential or random formatting, it must be adjusted to comply with the stream-sequential format.

Adjusting may be accomplished by means of a predefined look-up table used to map the IP identification from the host-sequential or random format to the stream-sequential format. Mapping of IP identifications has been previously disclosed in a related application entitled "Manipulating Header Fields For Improved Performance in Packet Communications", Application Serial No. 09/406,950 filed on September 28, 1999/

Finally, a radio frame synchronizer 36 synchronizes the data packets with the radio frames. The radio frame synchronizer 36 also functions as a type of buffer for the packets to temporarily store the packets. The synchronized packets are then sent via a transmitter 38 over the link 26 to the receiver 28.

FIGURE 4 shows the general flow of a data packet through the access technology 24. At step 40, a conventional header compression algorithm (such as ROCCO) is used to compress the header in a conventional manner. At steps 42 and 44, static information is sent if it has not been previously sent for this particular stream. At step 46, the header IP identification is examined to determine whether it follows a stream-sequential format,

i.e., is predictable. If the IP identification is not stream-sequential, then it is adjusted at step 48 to conform with the stream-sequential format. Once the IP identification has been adjusted, the packet is synchro-
5 nized to the radio frame and sent over the radio interface 26 at step 50.

FIGURE 5 further illustrates the function of the synchronizer 36. First, the RTP time stamp TS of the packet header is compared with the transmission time T_x
10 of the radio frame at step 52. As mentioned previously, each packet contains an RTP time stamp TS. The RTP time stamp TS indicates the point in time when the packet was created relative to the previous packet. This information is used to synchronize the data packet with
15 the outgoing radio frame as follows. Consider a packet P_{n-1} and a subsequent packet P_n . The packet P_{n-1} , in this example, has an RTP time stamp TS value of 20 representing 20 RTP time stamp units (each unit being equivalent to, say, 1mS), whereas the packet P_n has a TS
20 value of 40. The ΔTS in this case is 20. Now consider a radio frame sent at time T_x and a subsequent radio frame sent at time $T_x + \Delta T_x$. The synchronizer synchronizes the

data packets such that ΔTS is aligned with ΔT_x . Thus, if TS_n is greater than or equal to T_x plus $n\Delta T_x$, the packet P_{n-1} is sent with the radio frame at time T_x while the packet P_n is sent with the second radio frame at time $T_x + \Delta T_x$.

5 In some embodiments, a predefined offset C may be added to TS_n such as is shown at step 54. The packet is sent with the radio frame at step 56.

10 In the case where there is an extended difference in RTP time stamp values between packets, as illustrated in FIGURE 6, the synchronizer 36 may delay the packet by an appropriate multiplier of ΔT_x . As shown in FIGURE 6, a packet 60A corresponds to a radio frame 62A, packet 60B corresponds to radio frame 62B, but packet 60C is extended or delayed to radio frame 62D, skipping radio frame 62C.

15 Referring now to FIGURE 7, the receiver 28 also contains a number of functional components. A local counter 70 assigns an RTP sequence number to each packet received at the receiver 28 based on the order each packet was received. The local counter 70 is preferably either reset or preset according to the sequence number of the initial packet to be received. For example, this

information may be communicated initially as static information. The local counter 70 is then incremented by one with each packet received such that each packet has a different, higher RTP sequence number than the previous packet.

An IP identification processor 72 reconstructs the IP identification based on the RTP sequence number assigned by the local counter 70. For example, if the IP identification is based on a multiple of the RTP sequence number, the IP identification processor 72 may be able to obtain the IP identification by multiplying the RTP sequence number by the appropriate multiplier.

An RTP time stamp processor 74 reconstructs the RTP time stamp value of the packet based on the transmission time of the radio frame which carried that data packet. For example, the initial received packet may have a TS value of, say, 20. The next packet in the next radio frame will have a TS of 40, and so on. Like the RTP sequence number, the initial transmission time information may also be communicated initially with the static information.

A packet integrity checker 76 checks the header to make sure it has not been damaged in some way during the

transmission to the receiver 28. If the header has been damaged, it is discarded at this point. A conventional decompressor 78 reconstructs the various header fields and the data packet along with the reconstructed headers is sent to the next destination by a transmitter 80.

Referring now to FIGURE 8, a graphical depiction of the sequencing of the packets as they are received is shown. As can be seen, each new packet is assigned an RTP sequence number by the local counter, with each new packet receiving an RTP sequence number (SN) that is higher by 1 than the previous packet in this embodiment. Packets 80A and 80B are so received. Damaged packets, e.g., packet 80C, even though they are discarded, are still counted by the local counter in order to increase the RTP sequence number.

Referring now to FIGURE 9, the general flow at the receiver 28 is shown. The local counter is incremented at step 90. The packet is checked for damage at step 94, and discarded at step 96 if damage is found. If no damage is found, then the RTP sequence number, IP identification, and RTP time stamp are reconstructed at step 98, and the reconstructed header is forwarded at step 100 to the next destination.

Thus, by using the method described herein, the important fields of the packet header, namely the IP identification, RTP sequence number, and RTP time stamp can be obtained at the receiver side without having to transmit any header related information at the access technology side (except for any static information as previously mentioned).

It should be noted that for the method of the present invention to succeed, there can be no reordering of packets and no lost packets at the source without some indication to the access technology. If a packet is reordered or lost, or both, before the compression at the access technology, appropriate action must be taken in order to rectify the sequential misnumbering. Actions which may be taken include sending additional information to the compressor of the access technology to inform it of the packet reordering or loss and adjusting the packet flow at the decompressor of the receiver.

Although the invention has been described with reference to specific embodiments, various modifications and alternatives exist which were not described, but which are within the scope and spirit of the invention.

Patent Application
Docket No. 34645-502USPT

Accordingly, the invention should be limited by only the following claims.

1. A method of determining a value of a function of a variable, the method comprising: receiving a value of the variable; and determining the value of the function of the variable based on the received value of the variable.

WHAT IS CLAIMED IS:

1 1. A method of sending an IP-based data packet
2 across a radio link, said data packet having a packet
3 header including an IP identification header field,
4 sequence number header field, and time stamp header
5 field, said method comprising the steps of:

6 compressing said packet header;

7 adjusting an IP identification within said IP
8 identification header field of said packet header to
9 conform to a stream-sequential identification format;

10 synchronizing said data packet to a radio frame
11 based on a time stamp within said time stamp header field
12 of said packet header and a timing of said radio frame;
13 and

14 transmitting said data packet with said radio
15 frame over said radio link.

1 2. The method according to claim 1, wherein said
2 data packet is transmitted without information related to
3 changes in said IP identification, sequence number, or
4 time stamp.

1 3. The method according to claim 1, further
2 comprising the step of:
3 transmitting static information regarding said
4 data packet over said radio link.

1 4. The method according to claim 1, wherein said
2 packet header is compressed according to a ROCCO
3 compression protocol.

1 5. The method according to claim 1, further
2 comprising the step of:
3 reconstructing a sequence number within said
4 sequence number header field of said packet header by
5 incrementing a previous sequence number and assigning
6 said incremented sequence number to said data packet.

1 6. The method according to claim 5, further
2 comprising the step of:
3 reconstructing said IP identification within
4 said IP identification header field of said packet header
5 from said reconstructed sequence number.

1 7. The method according to claim 6, further
2 comprising the step of:

3 reconstructing said time stamp within said time
4 stamp header field of said packet header from said timing
5 of said radio frame.

1 8. The method according to claim 7, further
2 comprising the step of:

3 decompressing said packet header and forwarding
4 said data packet to a next destination.

1 9. A telecommunication system for sending an IP-
2 based data packet across a radio link, said data packet
3 having a packet header including an IP identification
4 header field, sequence number header field, and time
5 stamp header field, said system comprising:

6 a compressor for compressing said packet
7 header;

8 an IP identification processor for adjusting an
9 IP identification within said IP identification header
10 field to conform to a stream-sequential format;

11 a synchronizer for synchronizing said data
12 packet to a radio frame based on a time stamp within said

13 time stamp header field and a timing of said radio frame;
14 and
15 a transmitter for transmitting said data packet
16 with said radio frame over said radio link.

1 10. The telecommunication system according to
2 claim 9, wherein said data packet is transmitted without
3 information related to changes in said IP identification,
4 sequence number, or time stamp.

1 11. The telecommunication system according to
2 claim 9, further comprising a static information
3 processor for sending static information regarding said
4 data packet over said radio link.

1 12. The telecommunication system according to
2 claim 9, wherein said packet header is compressed
3 according to a ROCCO compression protocol.

1 13. The telecommunication system according to
2 claim 9, further comprising a counter for reconstructing
3 a sequence number within said sequence number header
4 field by incrementing a previous sequence number and

5 assigning said incremented sequence number to said data
6 packet.

1 14. The telecommunication system according to
2 claim 13, further comprising a second IP identification
3 processor for reconstructing said IP identification
4 within said IP identification header field from said
5 reconstructed sequence number.

1 15. The telecommunication system according to
2 claim 14, further comprising a time stamp processor for
3 reconstructing said time stamp within said time stamp
4 header field from said timing of said radio frame.

1 16. The telecommunication system according to
2 claim 15, further comprising a decompressor for
3 decompressing said packet header and a transmitter for
4 forwarding said data packet to a next destination.

ABSTRACT OF THE DISCLOSURE

An access technology integrated header compression method or apparatus sends an IP-based speech data packet over a radio interface without sending information related to changes in the IP identification, RTP sequence number, or RTP time stamp. The omission of information related to changes in these fields from the header reduces the bandwidth consumed by the header. These fields are then reconstructed at the receiver side of the radio interface.

6 N/A

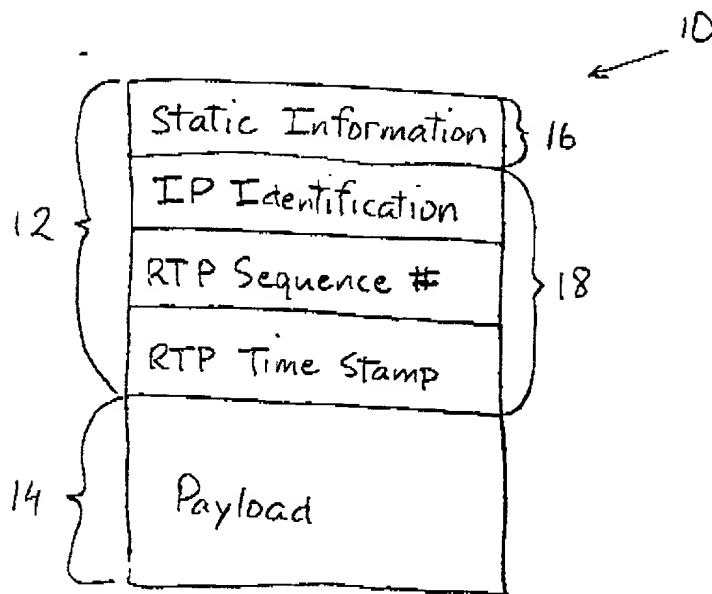


FIG. 1
(Prior Art)

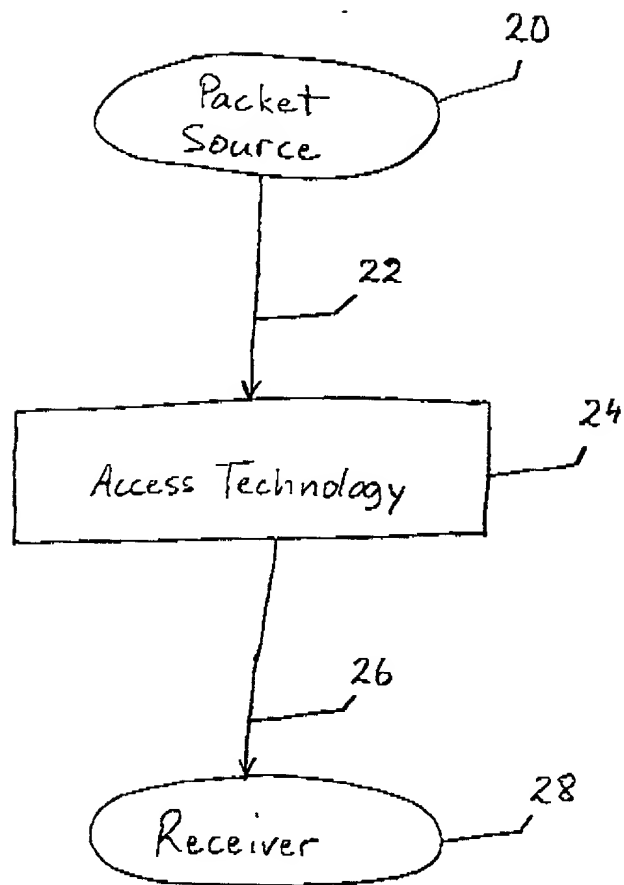


FIG. 2

24 →

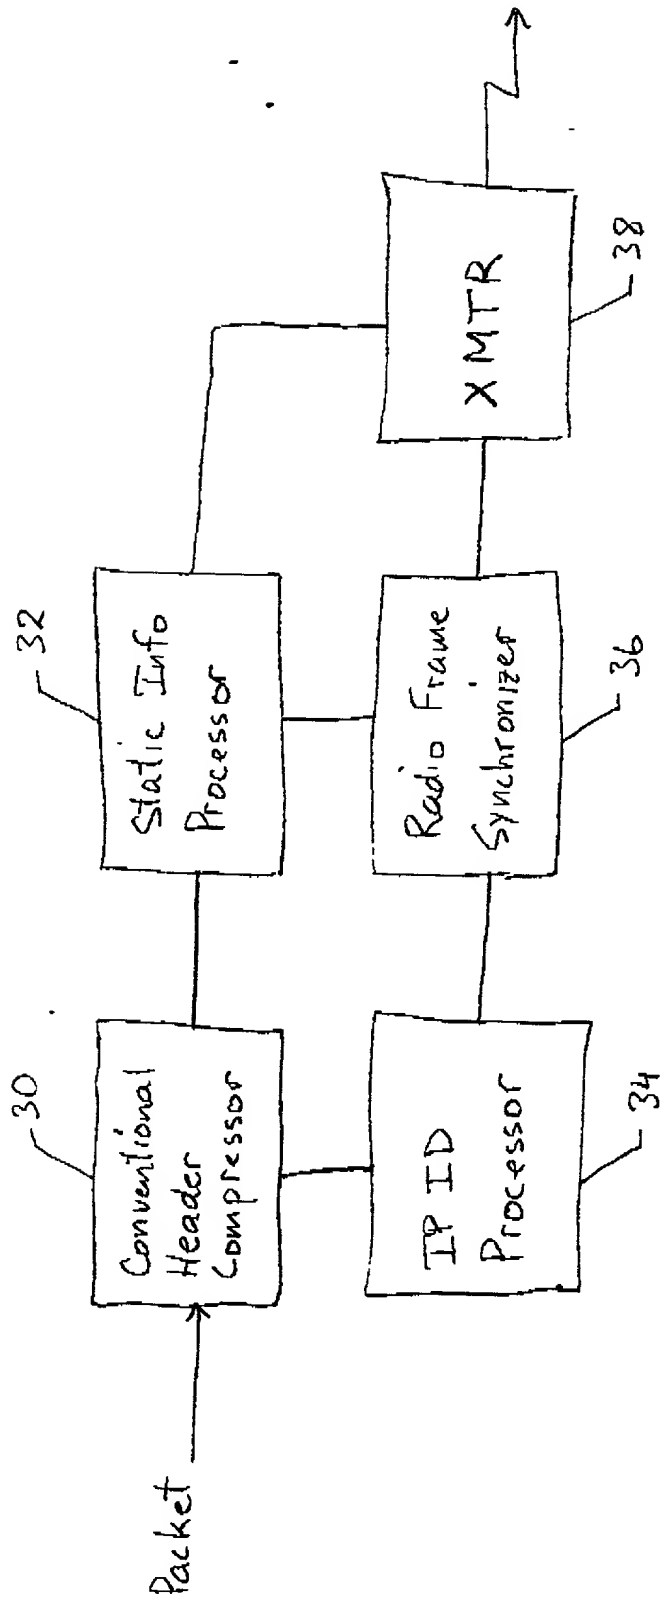


FIG. 3

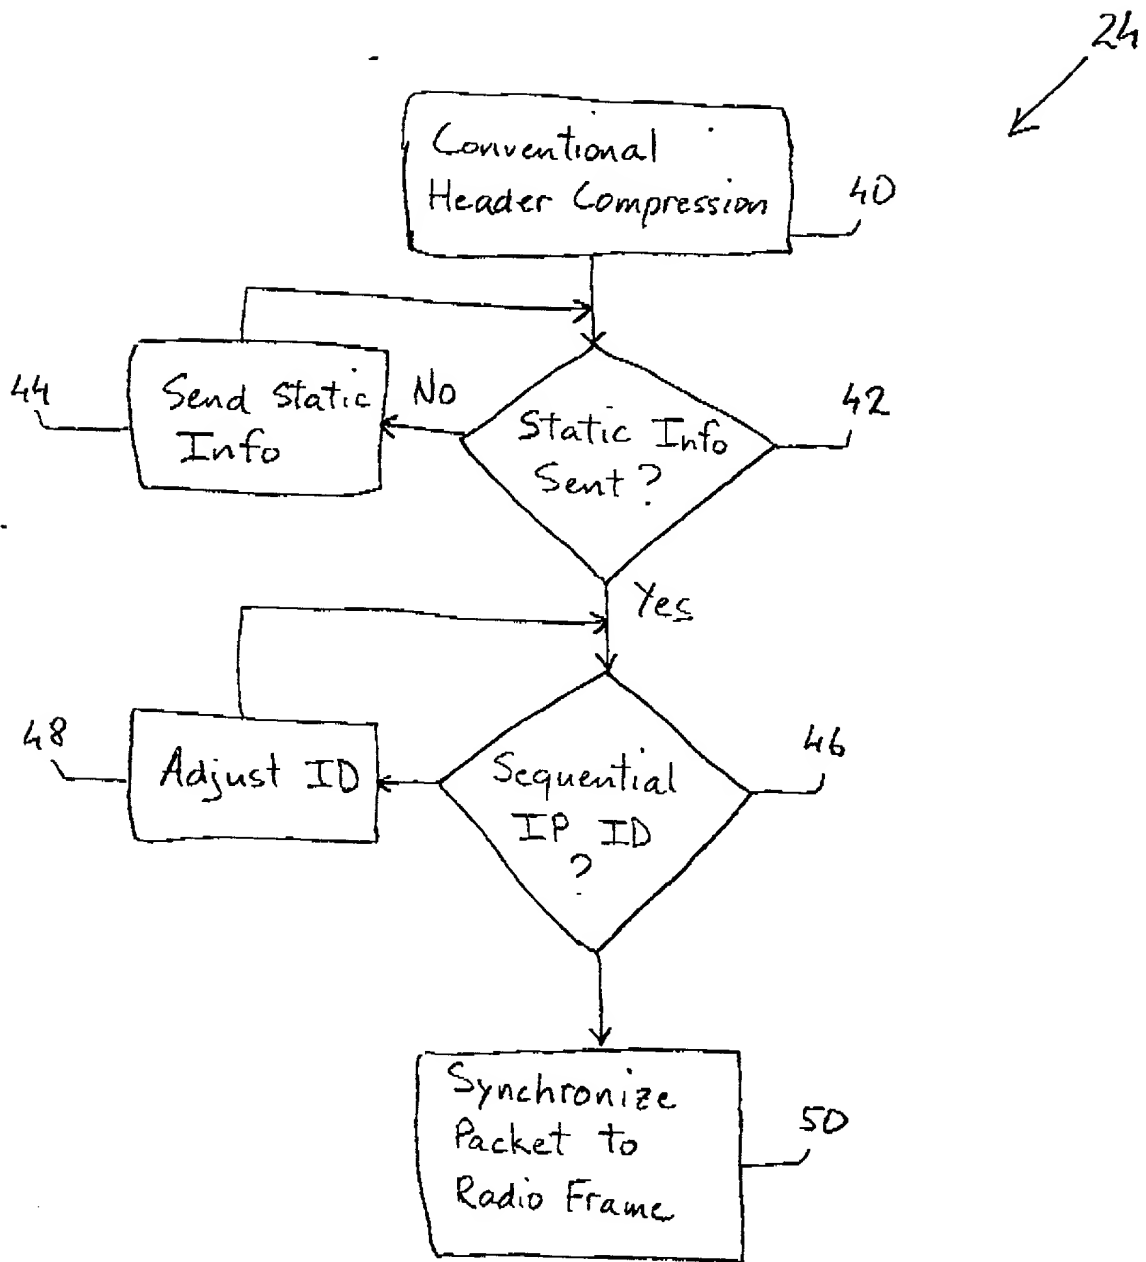


FIG. 4

36

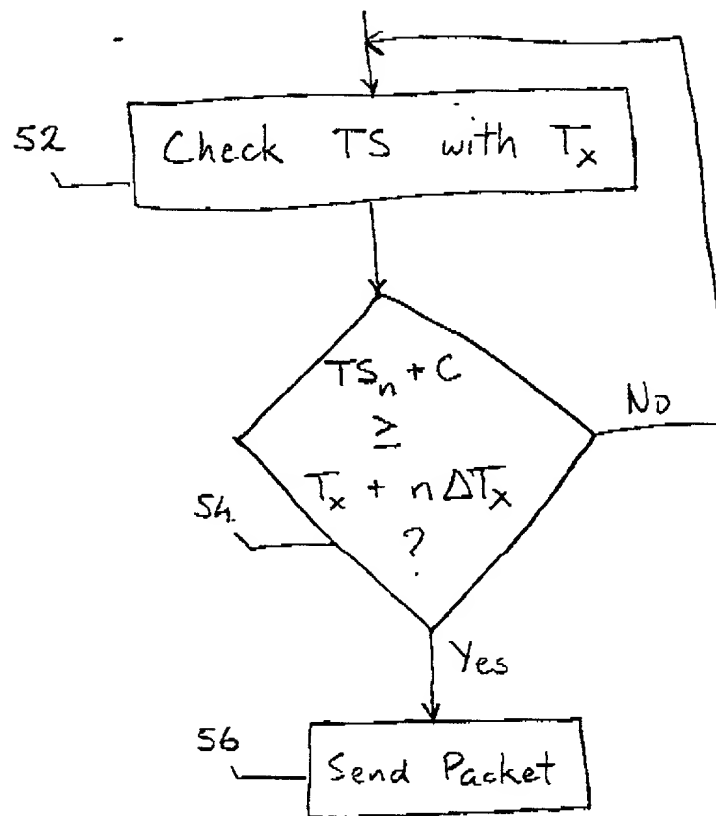


FIG. 5

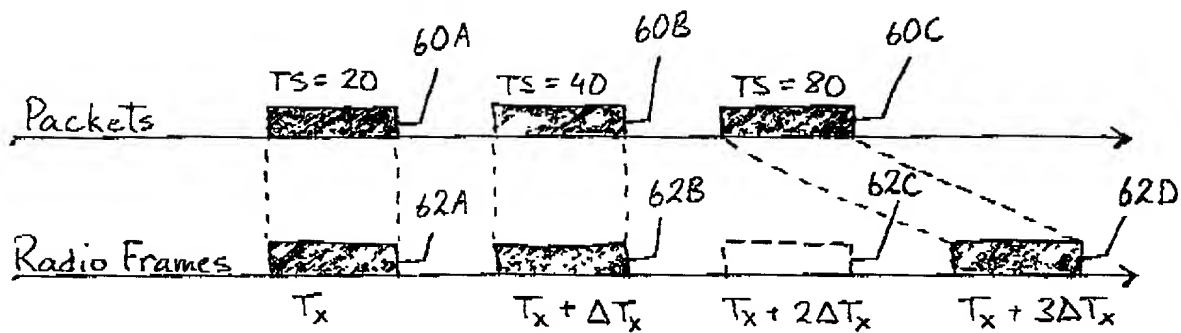


FIG. 6

28

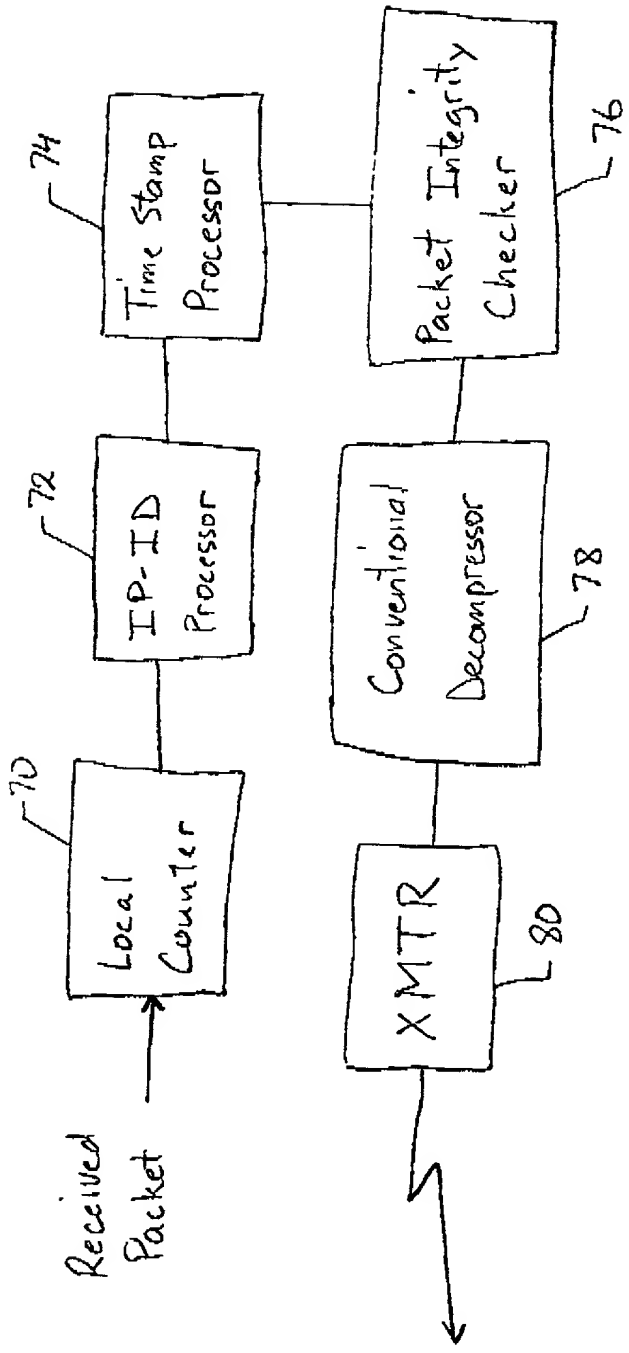


FIG. 7

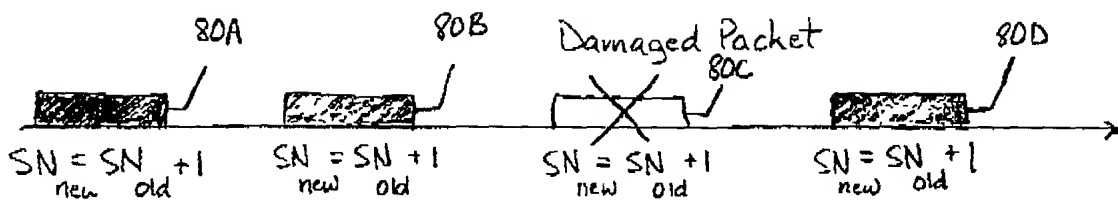


FIG. 8

28

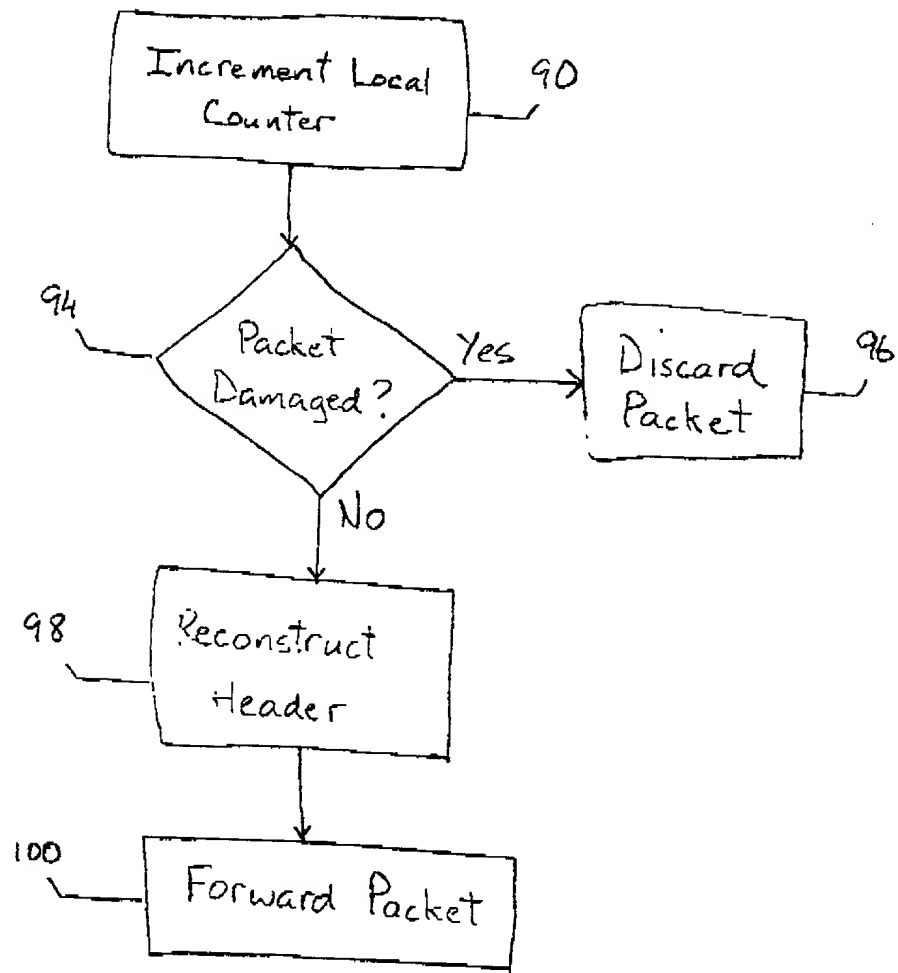


FIG. 9

COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; and

I verily believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **ACCESS TECHNOLOGY INTEGRATED HEADER COMPRESSION**, specification of which:

X is attached hereto.

— was filed on _____, under Attorney Docket No. _____ and assigned Application Serial No. _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the Office all information known to me to be material to the patentability of this application as defined in 37 CFR § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of any application on which priority is claimed:

Country	Number	Date Filed	Priority Claimed
---------	--------	------------	------------------

_____	_____	_____	_____
-------	-------	-------	-------

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose to the Office all information known to me to be material to

patentability of the application as defined in 37 CFR § 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Application Serial No.	Filing Date	Status (patented, pending)
<u>60/186,700</u>	<u>March 3, 2000</u>	<u>pending</u>

I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: Timothy G. Ackermann, Reg. No. 44,493; Benjamin J. Bai, Reg. No. P-43,481; Michael J. Blankstein, Reg. No. 37,097; Mary Jo Bolding, Reg. No. 34,713; Margaret A. Boulware, Reg. No. 28,708; Arthur J. Brady, Reg. No. 42,356; Matthew O. Brady, Reg. No. 44,554; Daniel J. Burnham, Reg. No. 39,618; Thomas L. Cantrell, Reg. No. 20,849; Ronald B. Coolley, Reg. No. 27,187; Thomas L. Crisman, Reg. No. 24,846; Stuart D. Dwork, Reg. No. 31,103; William F. Esser, Reg. No. 38,053; Roger J. French, Reg. No. 27,786; Janet M. Garetto, Reg. No. 42,368; John C. Gatz, Reg. No. 41,774; Russell J. Genet, Reg. No. 42,571; J. Kevin Gray, Reg. No. 37,141; Steven R. Greenfield, Reg. No. 38,166; J. Pat Heptig, Reg. No. 40,643; Sharon A. Israel, Reg. No. 41,867 ; John R. Kirk, Jr., Reg. No. 24,477; P. Weston Musselman, Jr., Reg. No. 31,644; Paul R. Kitch, Reg. No. 38,206; Timothy M. Kowalski, Reg. No. 44,192; Robert W. Mason, Reg. No. 42,848; Roger L. Maxwell, Reg. No. 31,855; Robert A. McFall, Reg. No. 28,968; Lisa H. Meyerhoff, Reg. No. 36,869; Stanley R. Moore, Reg. No. 26,958; Richard J. Moura, Reg. No. 34,883; Mark V. Muller, Reg. No. 37,509; Spencer C. Patterson, Reg. No. 43,849; Russell N. Rippamonti, Reg. No. 39,521; Stephen G. Rudisill, Reg. No. 20,087; Holly L. Rudnick, Reg. No. 43,065; Jennie J.L. Salazar, Reg. No. 45,065; Keith W. Saunders, Reg. No. 41,462; Jerry R. Selinger, Reg. No. 26,582; Gary B. Solomon, Reg. No. 44,347; Wayne O. Stacy, Reg. No. 45,125; Slawomir Steve Z. Szczepanski, Reg. No. 27,957; Andre M. Szuwalski, Reg. No. 35,701; Alan R. Thiele, Reg. No. 30,694; Tamsen Valoir, Reg. No. 41,417; Raymond Van Dyke, Reg. No. 34,746; Brian D. Walker, Reg. No. 37,751; Gerald T. Welch, Reg. No. 30,332; Harold N. Wells, Reg. No. 26,844, all of the Firm of **Jenkins & Gilchrist, P.C.**, 1445 Ross Avenue, Suite 3200, Dallas, Texas 75202-2799, and

Address all telephone calls and correspondence to:

Raymond Van Dyke
Jenkins & Gilchrist, P.C.
3200 Fountain Place
1445 Ross Avenue
Dallas, Texas 75202-2799
214/855-4708

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

1	Hans Hannu		
	Name	Inventor's Signature	Date
	Professorsvägen 274 SE-977 51 Lulea, Sweden Residence		Swedish Citizenship
	Professorsvägen 274 SE-977 51 Lulea, Sweden Post Office Address		
2	Krister Svanbro		
	Name	Inventor's Signature	Date
	Mjölkuddsvägen 133, 1 tr SE-973 43 Lulea, Sweden Residence		Swedish Citizenship
	Mjölkuddsvägen 133, 1 tr SE-973 43 Lulea, Sweden Post Office Address		